

THREELINE 



NEXA

LED TRUNKING SYSTEM

NEXA LED TRUNKING SYSTEM

Continuous linear lighting system with electrified trunking rail.

160 actual
lm/W


Threeline Group presents **NEXA**, a continuous linear lighting system with an electrified trunking rail that allows different types of luminaires to be installed without the need for pre-installed wiring.

With an efficiency of 160 actual lm/W, **NEXA** is available with 2 types of luminaires: a standard version and a version with an integrated emergency kit. Both include a **POWER SWITCH**, 5 lens options and optional **DALI** dimming.


The electrified trunking rail is available in three lengths (750, 1500 and 3000 mm) and includes an 8-wire connector, with a 12-wire option available on request. The system also allows different modules to be integrated, such as a blanking section, emergency exit sign and customisable projector for logos and signage.

This system stands out for its easy installation and maintenance. Thanks to its continuous wiring, the luminaires and modules can be installed according to the requirements of each project.

FEATURES

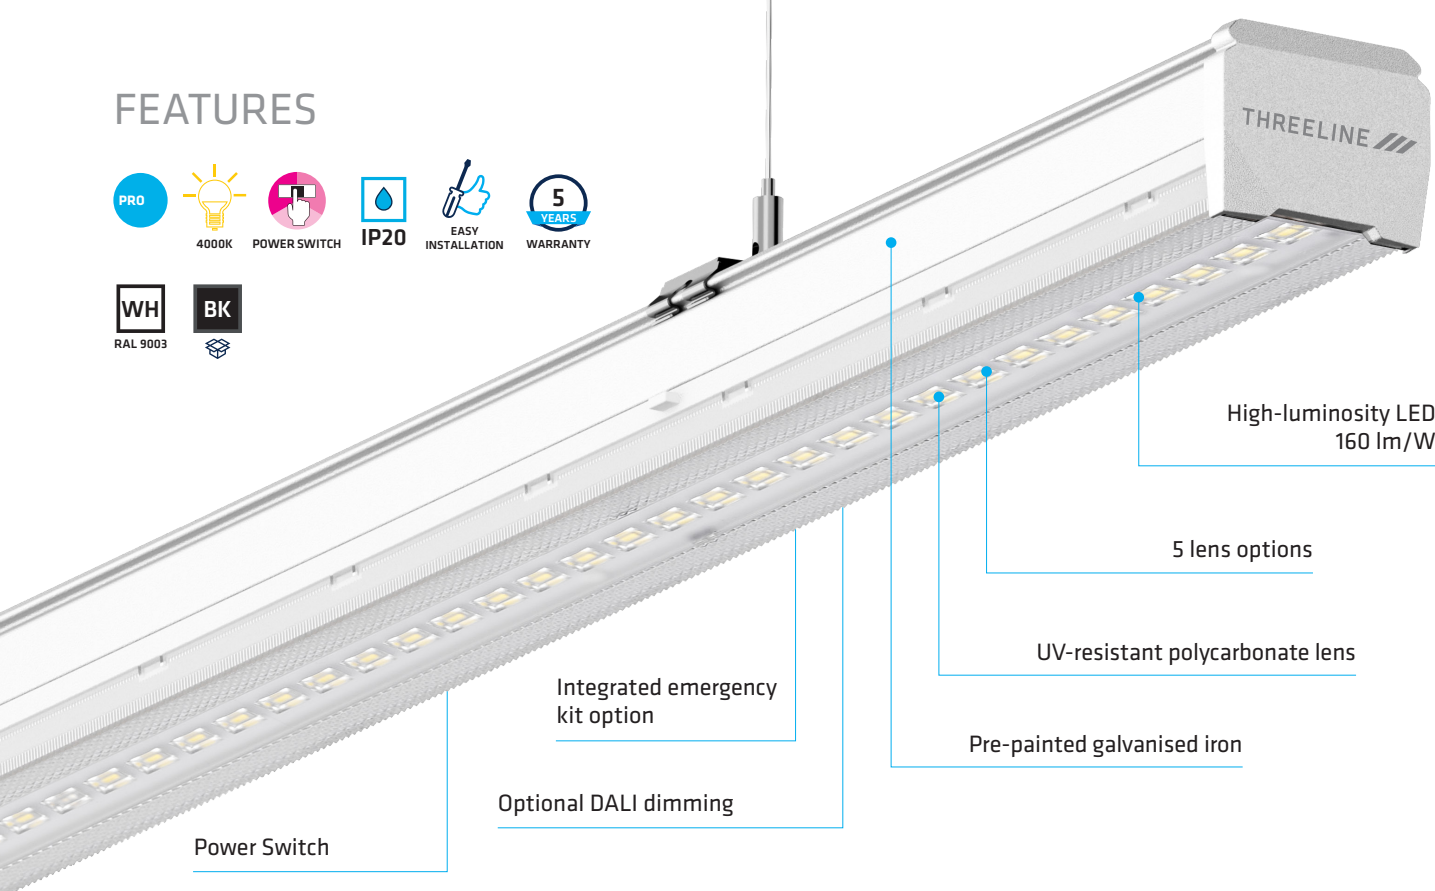

• Power Switch



• Power Switch KE



• Dimming Opt.



• Included



• Optional




On request.

• Materials



• Lens

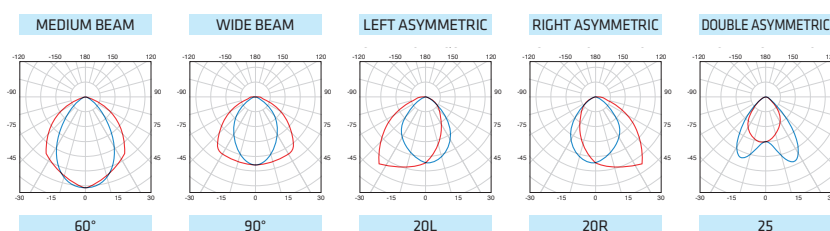

• Installation accessories



• Connection accessories



EASY INSTALLATION

Thanks to its design, the luminaires and modules are very easy to install, with no tools required.


Connection accessories



Quick connection to the power supply


Selectable electrical phase

Push and clip mechanism

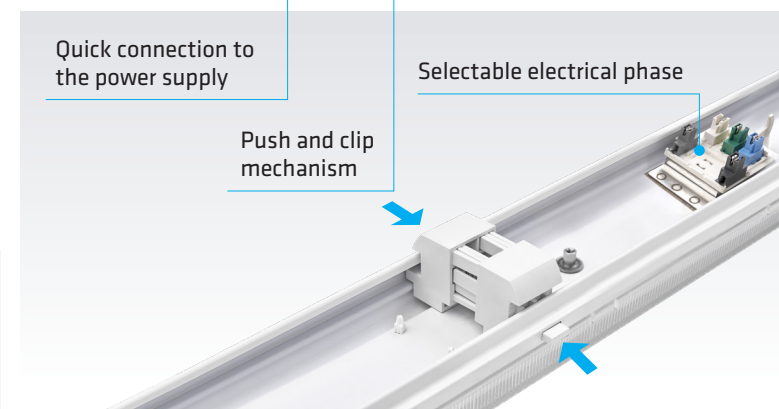

Suspension and surface mounting accessories
(Allows distances of up to 3 m.)


Connection plate with locking system

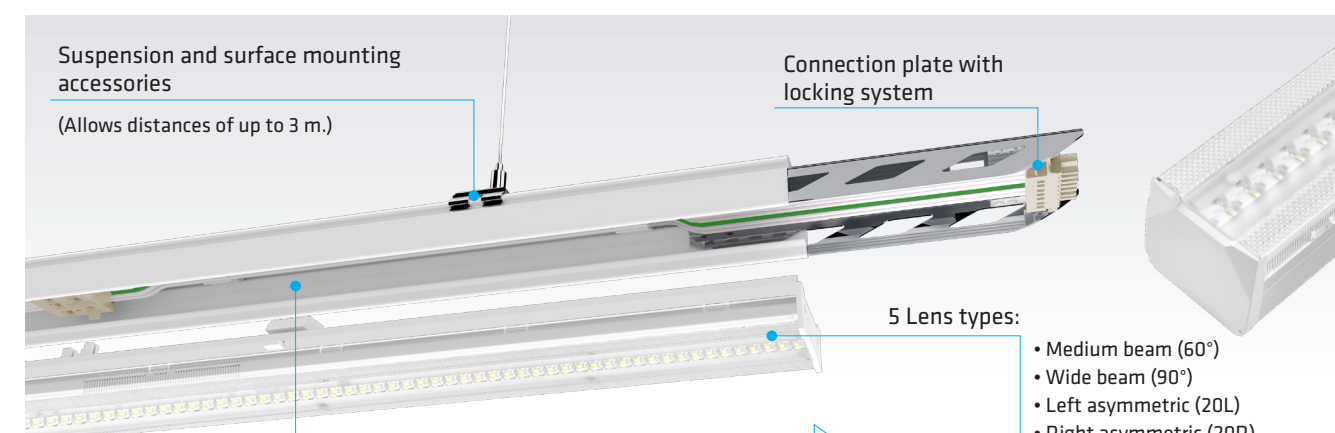

5 Lens types:


- Medium beam (60°)
- Wide beam (90°)
- Left asymmetric (20L)
- Right asymmetric (20R)
- Double asymmetric (25)

Plug-in connector:



QUICK CONNECTION BETWEEN TRUNKING RAILS

The system features **8-wire** pre-wiring with an internal quick connector. A **12-wire** pre-wiring option is available on request.

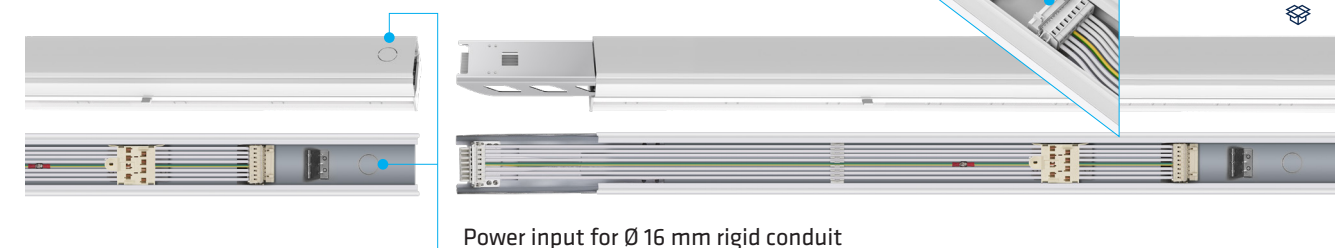


Trunking rail length: 3000 mm | 1500 mm | 750 mm



Luminaire length: 1500 mm



Blanking section: 1500 mm | 750 mm



Emergency exit sign




Projector



PRO NEX608040





- Material
- Certif.
- Dimming Opt.

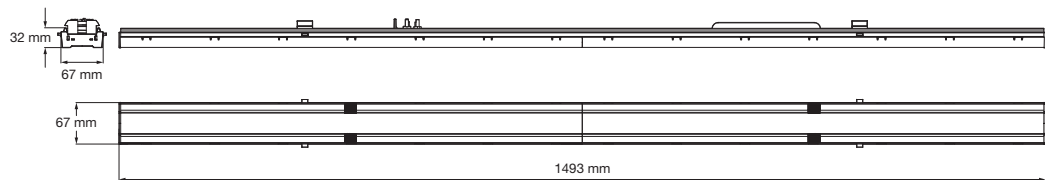

- Compatible trunking rails

	Section	Connector
NEXTR8C1500WH	Initial / Middle	1500 mm 8 wires
NEXTR8C3000WH	Initial / Middle	3000 mm 8 wires
NEXTRF1500WH	Final / Single	1500 mm —
NEXTRF3000WH	Final / Single	3000 mm —

- Lenses


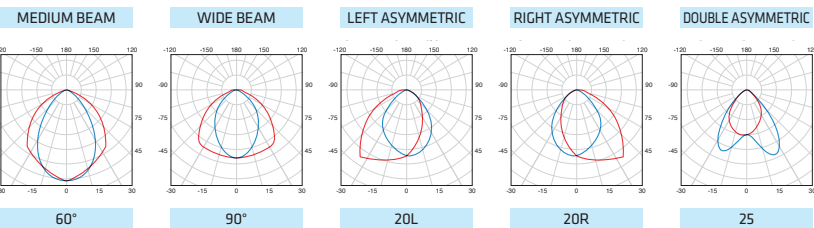


			K	W		
NEX60804060WH	ON-OFF	60°				
NEX60804060WHD2	DALI					
NEX60804090WH	ON-OFF	90°		60 W	10800 lm	9600 lm
NEX60804090WHD2	DALI					
NEX60804020RWH	ON-OFF	20R	4000K	70 W	12600 lm	11200 lm
NEX60804020RWHD2	DALI					
NEX60804020LWH	ON-OFF	20L		75 W	13500 lm	12000 lm
NEX60804020LWHD2	DALI					
NEX60804025WH	ON-OFF	25		80 W	14400 lm	12800 lm
NEX60804025WHD2	DALI					

PRO NEX305040





- Material
- Certif.
- Dimming Opt.

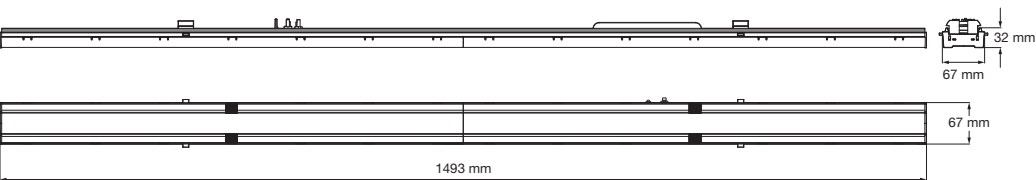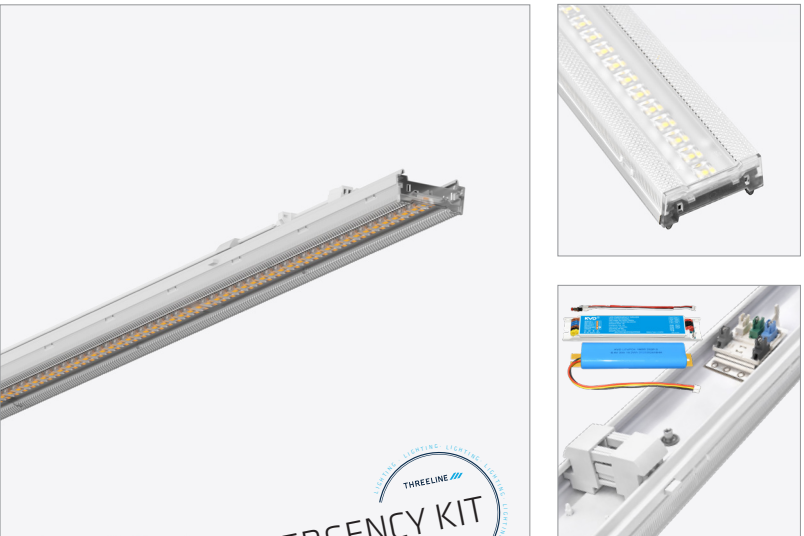

- Compatible trunking rails

	Section	Connector
NEXTR8C1500WH	Initial / Middle	1500 mm 8 wires
NEXTR8C3000WH	Initial / Middle	3000 mm 8 wires
NEXTRF1500WH	Final / Single	1500 mm —
NEXTRF3000WH	Final / Single	3000 mm —


- Lenses

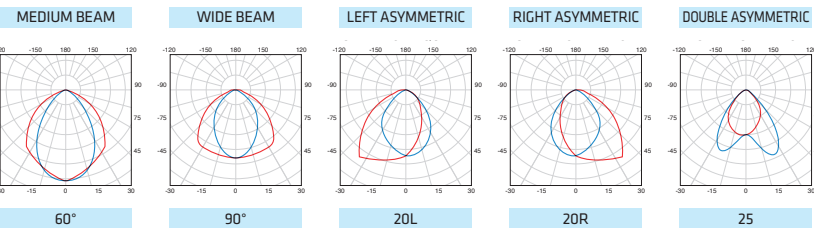

			K	W		
NEX30504060KWH	ON-OFF	60°				
NEX30504060KWHD2	DALI					
NEX30504090KWH	ON-OFF	90°		30 W	5400 lm	4800 lm
NEX30504090KWHD2	DALI					
NEX30504020RKWH	ON-OFF	20R	4000K	40 W	7200 lm	6400 lm
NEX30504020RKWHD2	DALI					
NEX30504020LKWH	ON-OFF	20L		45 W	8100 lm	7200 lm
NEX30504020LKWHD2	DALI					
NEX30504025KWH	ON-OFF	25		50 W	9000 lm	8000 lm
NEX30504025KWHD2	DALI					

NEXA INITIAL / MIDDLE TRUNKING RAIL

PRO NEXTR8C

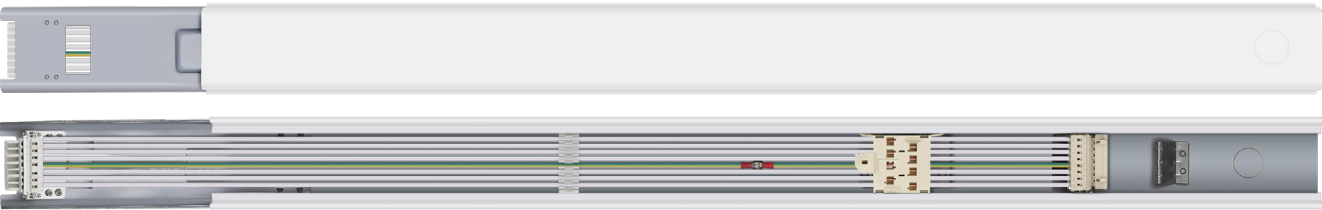

IP20

RAL 9003

BK

5 YEARS WARRANTY

• Material

Fe

BODY

• Certif.



• Included



8-WIRES CONNECTOR	
L1	Phase 1
L2	Phase 2
L3	Phase 3
N	Neutral
PE	Protective earth
D+	DALI
D-	DALI
EM	Emergency*



• Optional



On request.

12-WIRES CONNECTOR	
L1	Phase 1
L2	Phase 2
L3	Phase 3
N	Neutral
PE	Protective earth
D+	DALI
D-	DALI
EM	Emergency*
EL1	Emergency phase 1
EN1	Emergency neutral 1
EL2	Emergency phase 2
EN2	Emergency neutral 2

*Emergency power supply via internal battery.

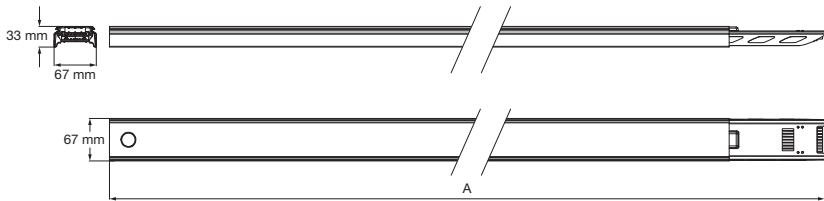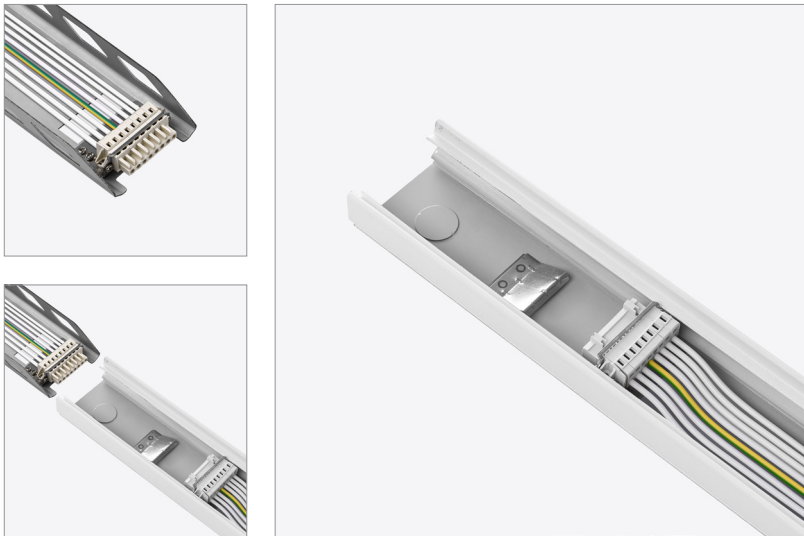

	A
NEXTR8C750	900 mm
NEXTR8C1500	1645 mm
NEXTR8C3000	3138 mm

• Installation accessories

SURFACE MOUNTING

SUSPENSION

Ref. ANEXSP

Ref. ANEXS

• End caps



• Connection accessories

L CONNECTOR T CONNECTOR X CONNECTOR



Ref. UNEXLWH



Ref. UNEXTWH




Ref. UNEXXWH

	SECTION		CONNECTOR
NEXTR8C750WH	Initial / Middle	750 mm	8 wires
NEXTR8C1500WH	Initial / Middle	1500 mm	8 wires
NEXTR8C3000WH	Initial / Middle	3000 mm	8 wires

Sob pedido.

NEXA FINAL / SINGLE TRUNKING RAIL

PRO NEXTRF

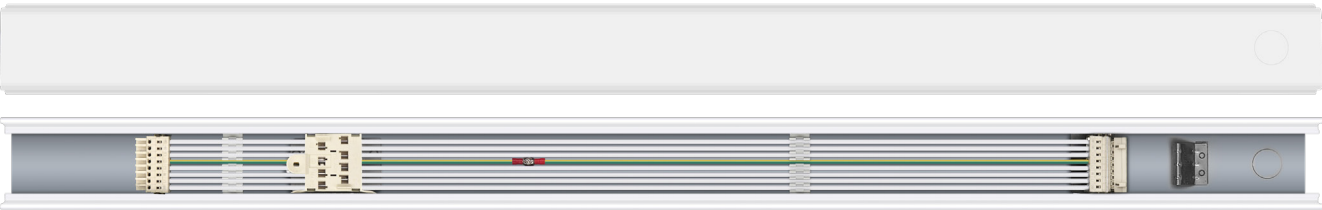

IP20

RAL 9003

BK

5 YEARS WARRANTY

• Material

Fe

BODY

• Certif.



• Included



8-WIRES CONNECTOR	
L1	Phase 1
L2	Phase 2
L3	Phase 3
N	Neutral
PE	Protective earth
D+	DALI
D-	DALI
EM	Emergency*


• Optional



On request.

12-WIRES CONNECTOR	
L1	Phase 1
L2	Phase 2
L3	Phase 3
N	Neutral
PE	Protective earth
D+	DALI
D-	DALI
EM	Emergency*
EL1	Emergency phase 1
EN1	Emergency neutral 1
EL2	Emergency phase 2
EN2	Emergency neutral 2

*Emergency power supply via internal battery.

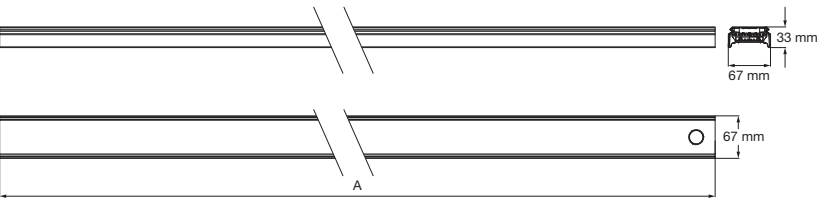

	A
NEXTRF1500	1493 mm
NEXTRF3000	2987 mm

• Installation accessories

SURFACE MOUNTING

SUSPENSION

Ref. ANEXSP

Ref. ANEXS

• End caps



• Connection accessories

L CONNECTOR T CONNECTOR X CONNECTOR



Ref. UNEXLWH



Ref. UNEXTWH



Ref. UNEXXWH


	SECTION		CONNECTOR
NEXTRF1500WH	Final / Single	1500 mm	8 wires
NEXTRF3000WH	Final / Single	3000 mm	8 wires

Sob pedido.

NEXA. MODULES (COMPATIBLE WITH ALL TRUNKING RAILS OF THE SAME LENGTH).

BLANKING SECTION



PRO Ref. **NEXTR750CWH** / **NEXTR1500CWH**

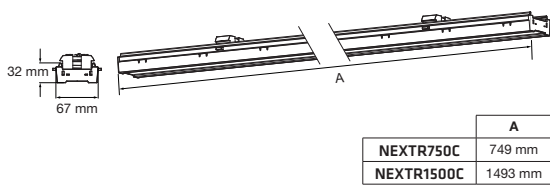

SECTION		
NEXTR750CWH	Blanking	750 mm
NEXTR1500CWH	Blanking	1500 mm

EMERGENCY EXIT SIGN

PRO Ref. **NEXEMWH**

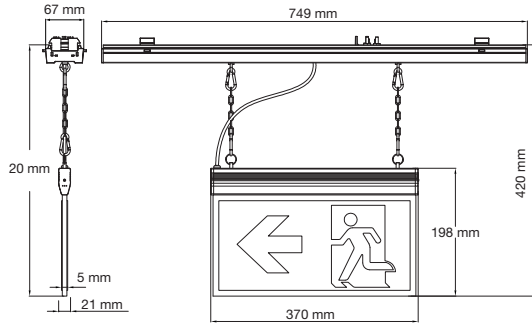


CUSTOMISABLE PROJECTOR

PRO Ref. **NEXPCWH**



Customisable projector with a personalised image **on request**.

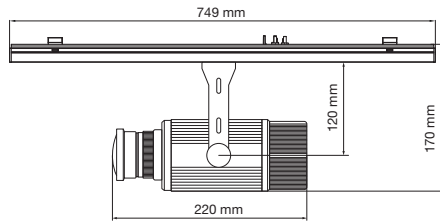

Material on request.

NEXA. ACCESSORIES



L CONNECTOR



Ref. **UNEXLWH**
440 x 289 x 65 mm. (2 units)

T CONNECTOR



Ref. **UNEXTWH**
640 x 289 x 65 mm.

X CONNECTOR



Ref. **UNEXXLWH**
640 x 640 x 65 mm.

POWER FEED CONNECTOR




Ref. **CANEXWH**
301 x 90 x 65 mm.

INTERNAL CONNECTOR



Ref. **CNEXMU**
640 x 289 x 65 mm.

END CAPS

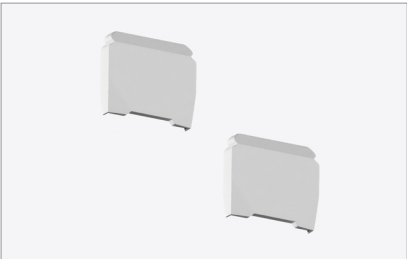

Ref. **NEXTFWH**
71 x 60 x 16 mm. (2 units)

SUSPENSION MOUNTING



Ref. **ANEXS**
35 x 64 x 60 mm. (2 units) 1500 mm. Cable.

SURFACE MOUNTING



Ref. **ANEXSP**
35 x 64 x 12 mm.

Material on request.

THREELINE

Can't find what **you need?**

WE CREATE
CUSTOM PROJECTS
FOR YOU

☎ +34 967 318 293

✉ tl@threeline.es



THREELINE 
ThreelineGroup.com